


NOTE:

- Electrical properties:
 - ALL COMPONENTS ARE RoHS COMPLIANT.
 - 100% OPEN AND SHORT TEST.
 - CONDUCTOR RESISTANCE:3 OHMS
 - INSULATION RESISTANCE:10 MEGOHMS.
 - HI-POT:DC200V/0.01S
 - PC TEST 1920*1200 60HZ PASS
- ROHS 2.0 and REACH

PRINTING: High Speed Cable 20276 80 C 30V VW-1

MODEL LIST

| Model | Length | DSP |
|------------|--------|----------------|
| 11.99.5800 | 1000mm | 1920*1200 60Hz |
| 11.99.5801 | 1500mm | 1920*1200 60Hz |
| 11.99.5802 | 2000mm | 1920*1200 60Hz |
| 11.99.5803 | 3000mm | 1920*1200 60Hz |
| 11.99.5804 | 5000mm | 1920*1200 60Hz |

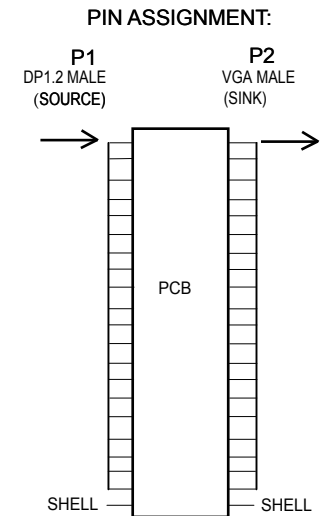

MATERIAL LIST

| No. | PART NAME | DESCRIPTION | QTY |
|-----|------------|---|-----|
| ⑥ | DUST COVER | PE, COLOR: TRANSPARENT | 2 |
| ⑤ | CABLE | (1/0.32BC*1P+1/0.32BC+AM)*5C+1/0.32BC*4C+AM+1/0.32BC+160/0.12ALMG+PVC OD:7.0±0.2MM COLOR: BLACK | L |
| ④ | OUTER MOLD | BLACK ABS | 1 |
| ③ | SCREW | #4-40 UNC,HOOD MOLDED:BLACK PVC | 2 |
| ② | CONNECTOR | VGA MALE, GOLD PLATED PIN, GOLD PLATED SHELL | 1 |
| ① | CONNECTOR | DP1.2 MALE, GOLD PLATED PIN,GOLD PLATED SHELL | 1 |

| | | | |
|---------------|--|---------|-----------|
| SECOMP | | | |
| NAME | VALUE DisplayPort to VGA Cable, DP-VGA, M/M, black | | |
| MODEL No. | 11.99.5800/11.99.5801 | MAPE | TOLERANCE |
| | 11.99.5802/11.99.5803 | | X. ±1.00 |
| 11.99.5804 | X.X ±0.50 | | |
| APPROVE BY | CHECK BY | DRAW BY | SCALE |
| | | | MM |
| | | | PAGE |
| | | | 1/1 |