


UNIT	MM
------	----

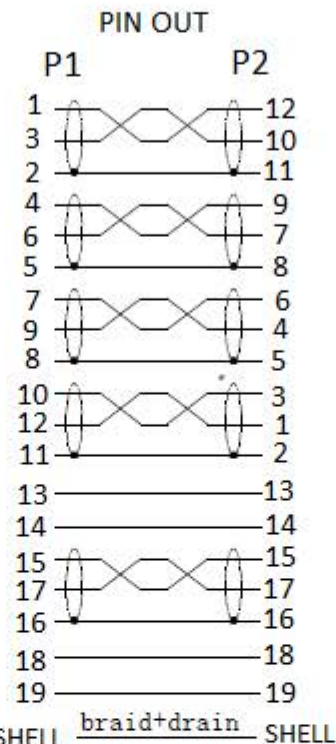

NOTE:

- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance:DC 300V 10M ohm min;
 - Contact resistance:5 ohm max;
 - Dielectric strength:150V AC/Sec, 1mA.
 - Displayport practical application Test Pass 5k*3k@60HZ
- ROHS 2.0 AND REACH COMPLIANT
- PRINT WORD:5K×3K Displayport Cable E***** 兄 AWM STYLE 20276 80°C 30V VW-1
- Storage temperature : -20°C~+75°C
- Operation temperature: -10°C~+60°C
- Display port Connector without DP logo

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK
⑥	DUST CAP	LD-PE WHITE	2	
⑤	TUBE END	BLACK PVC 45P	2	
④	INNER COVER	LD PE	2	
③	HOUSING	ABS assembly Black	2	
②	CONNECTOR	DP 20P/M WITH LATCHING SOLDER TYPE, BLACK INSULATION, THE PIN GOLD PLATED THE SHELL FOR GOLD PLATED With Iron shielding	2	
①	CABEL	DP (28AWG BC*1P+E+AL+MYLAR)*5+28AWG BC*4C+AEB JACKET:PVC/BLACK OD:7.3±0.2mm	1	

ITEM NO	LENGTH
11.99.5812	3000mm ^{+50mm} _{-50mm}
11.99.5813	5000mm ^{+70mm} _{-70mm}

DESC. VALUE DisplayPort Cable, v1.3/1.4, DP M/M, black

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2019.02.25	A

