


Skizze / Bild

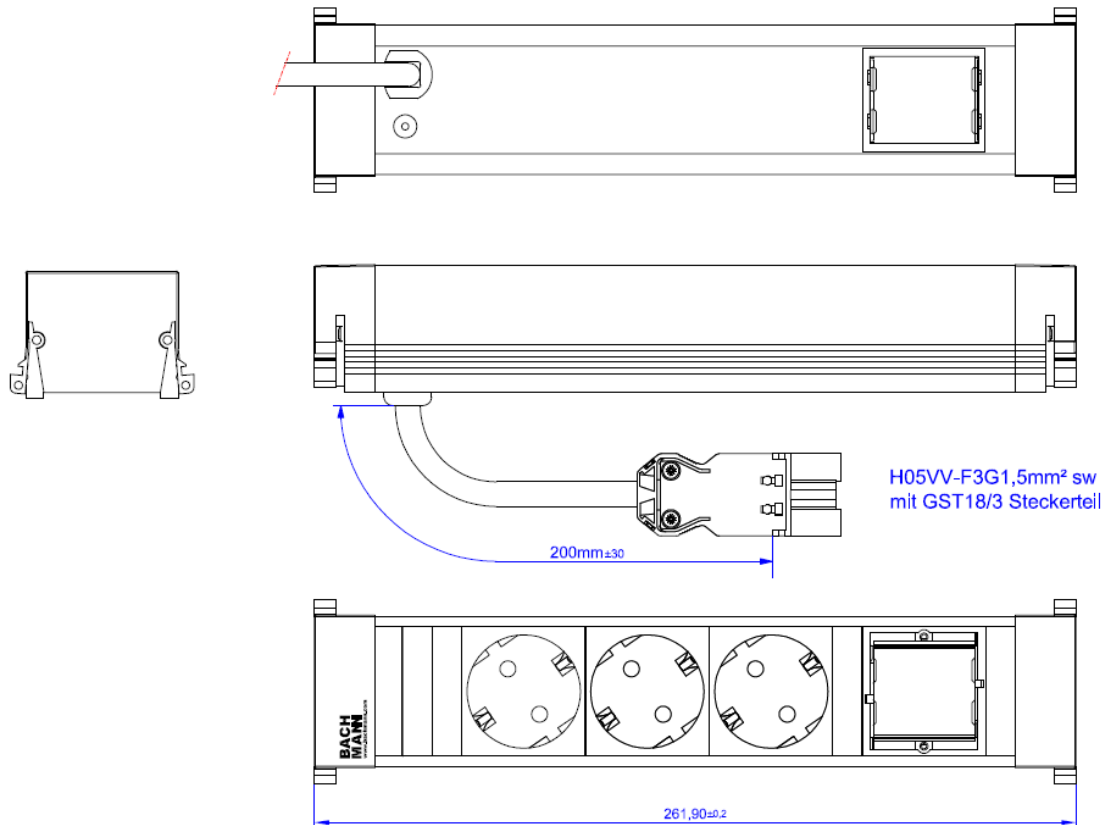

H05VV-F3G1,5mm² sw
mit GST18/3 Steckerteil

200mm±30

261,90±0,2

<p>Power Frame 3xSchutzkontaktsteckdosen 1xABD mit 0,2m H05VV-F 3G1,5mm² GST18i3 Flachstecker</p> <p>Steckdosen:</p> <ul style="list-style-type: none"> Nach IEC 60884, VDE 0620-1 2-polig mit Schutzkontakt, mit erhöhtem Berührungsschutz 250V~, 16A, IP20, 35° schwarz <p>Custom Module:</p> <ul style="list-style-type: none"> 1x Abdeckung für Custom Module <p>Anschluss:</p> <ul style="list-style-type: none"> Nicht wiederanschießbar, Endkappen genietet 0,2m H05VV-F 3G1,5mm² schwarz mit Wieland GST18/3 Stecker schwarz verriegelbar <p>Material:</p> <ul style="list-style-type: none"> Kunststoff: PA6 GF 30 V1, Glühdraht-Prüfung bis 850°C Profil und Rückenblende: Aluminium <p>Abmessungen:</p> <ul style="list-style-type: none"> 261,90x52,4x44mm <p>Lieferform:</p> <ul style="list-style-type: none"> In Polybeutel verpackt <p>Lieferumfang:</p> <ul style="list-style-type: none"> 1x Steckdosenleiste 	<p>Power Frame 3xGerman type sockets 1xcover for custom module with 0,2m H05VV-F3G1,5mm² with GST18/3 plug</p> <p>Steckdosen:</p> <ul style="list-style-type: none"> According IEC 60884, VDE 0620-1 2-pole with earthing contact, incl. enhanced touch protection 250V~, 16A, IP20, 35° Black <p>Custom Module:</p> <ul style="list-style-type: none"> 1x cover for custom module <p>Connection:</p> <ul style="list-style-type: none"> Non-rewireable, riveted endcaps 0,2m H05VV-F 3G1,5mm² black with Wieland GST18/3 plug black lockable <p>Material:</p> <ul style="list-style-type: none"> Plastic: PA6 GF 30 V1, glow wire resistant up to 850°C Profile and back cover: Aluminum <p>Measurements:</p> <ul style="list-style-type: none"> 261,90x52,4x44mm <p>Packing:</p> <ul style="list-style-type: none"> In polybag packed <p>Extent of delivery:</p> <ul style="list-style-type: none"> 1x socket strip
---	---