




Datenblatt - Fiche technique - Data sheet



**21.15.2620**

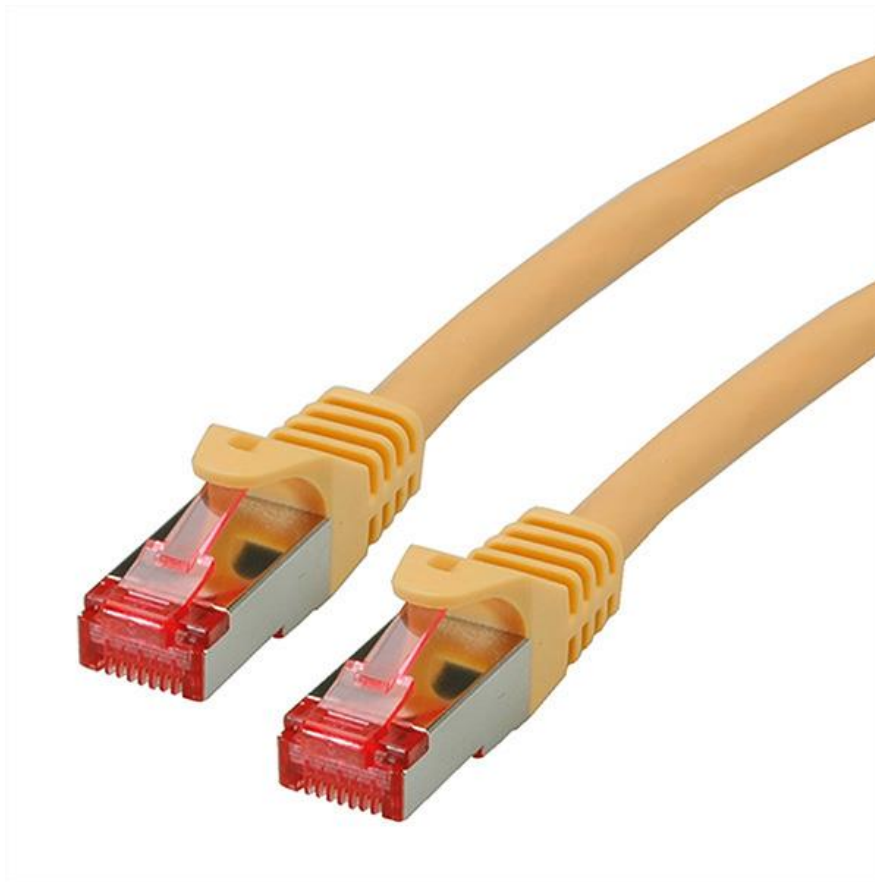

ROLINE Patchkabel Kat.6 S/FTP (PiMF), Component Level, LSOH, gelb, 0,5 m

Cordon ROLINE S/FTP(PiMF) Cat.6, LSOH, Component Level, jaune, 0,5 m

ROLINE S/FTP Patch Cord Cat.6 Component Level, LSOH, yellow, 0.5 m

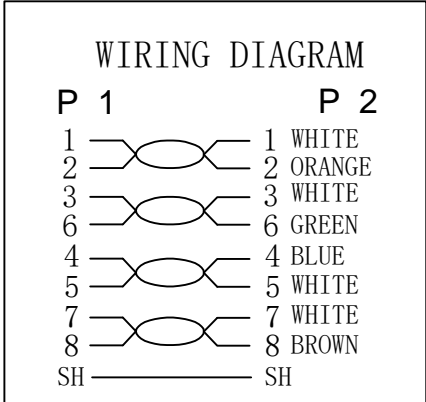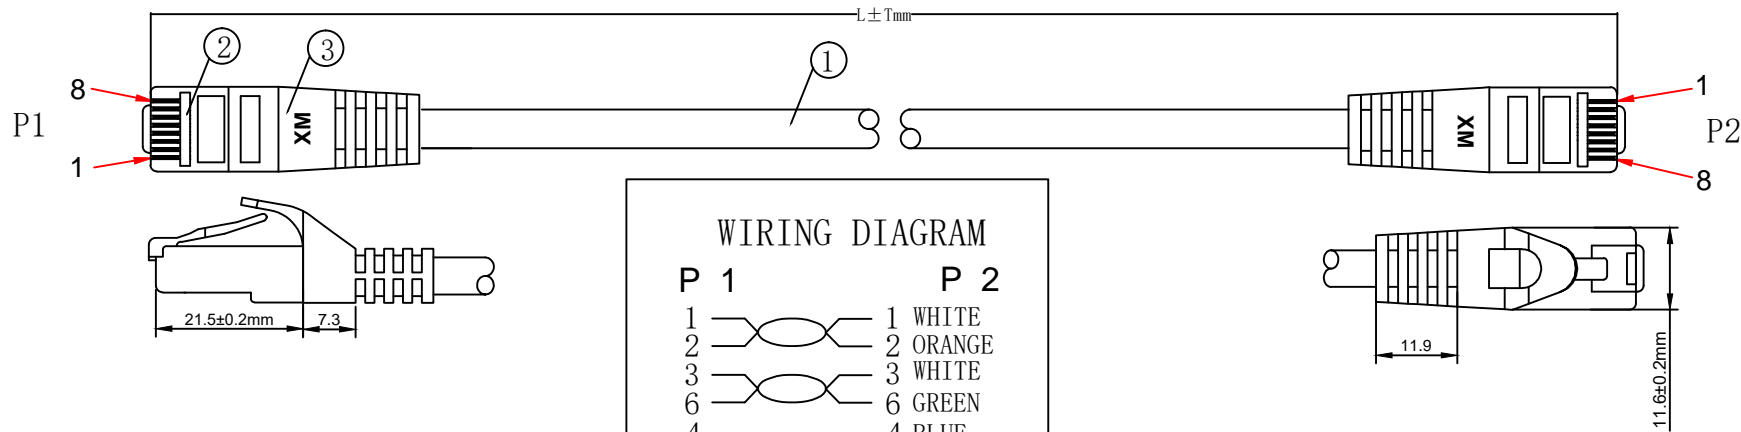

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 S/FTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

- 3. 100% Component Patch cord Test PASS
- 4. Minimum bending radius:60mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC yellow	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent RED	2PCS	
①	CABLE	S/FTP CAT.6 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2 ± 0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:yellow (PANTONE:135C)

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2953	300mm	± 10mm
21. 15. 2620	500mm	± 15mm
21. 15. 2621	1000mm	± 30mm
21. 15. 2624	1500mm	± 45mm
21. 15. 2622	2000mm	± 60mm
21. 15. 2623	3000mm	± 90mm
21. 15. 2625	5000mm	± 150mm
21. 15. 2626	7500mm	± 210mm
21. 15. 2627	10000mm	± 300mm
21. 15. 2628	15000mm	± 450mm
21. 15. 2629	20000mm	± 600mm

ITEM NO.	21. 15. 2953	21. 15. 2620	21. 15. 2621	21. 15. 2622	21. 15. 2623
21. 15. 2624	21. 15. 2625	21. 15. 2626	21. 15. 2627	21. 15. 2628	21. 15. 2629
DESC.	ROLINE S/FTP PatchCord CAT. 6, LSOH, Comp. Level, yellow				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-10-20	A

**SECOMP**