
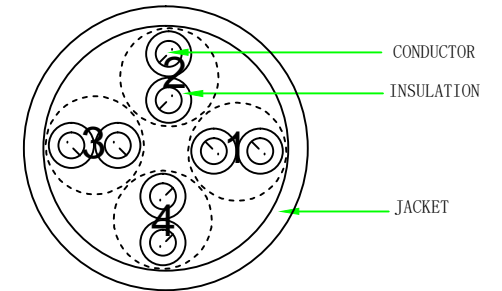


PIN OUT

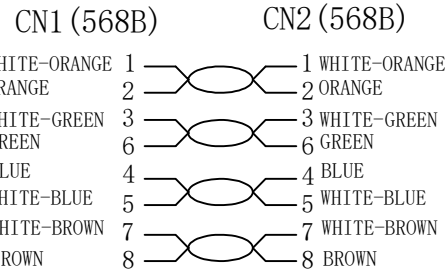

NOTE:


1. Fluke Channel Test ISO 11801 channel Class Ea
2. RoHS2.0 AND REACH compliant
3. Electrical test: 100% open short & miss wire test;
4. OPERATING TEMPERATURE: -10°C ~ 60°C
5. Print word: CAT6A U/UTP 4x2x32AWG/7 LSZH ISO11801 & EN50173 & ANSI/TIA568C.2
6. Minimum of the bending radius is 30mm (Suitable for all meters)

MATERIAL LIST

③	CABLE	CAT. 6A U/UTP CABLE (32AWG BC*1P)*4+JACKET:LSZH/GREEN, OD:3.4±0.2mm	1	
②	Over mold	48P PVC/GREEN	2	
①	Plug	RJ45 8P8C Unshielded Plug, PIN GOLD PLATED 3u", TRANSPARENT	2	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

Color: Green (Pantone 3278C)	
ITEM No.	LENGTH
21.15.3930	150±5mm
21.15.3931	300±10mm
21.15.3932	500±30mm
21.15.3933	1000±30mm
21.15.3934	1500±50mm
21.15.3935	2000±50mm
21.15.3936	3000±70mm
21.15.3937	5000±70mm

Minimum of the bending radius 30mm



DESC.	ROLINE Cat.6A UTP Patch Cord, LSOH, Slim, Green
-------	---

SECOMP

		NEW	2019-06-17	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.