
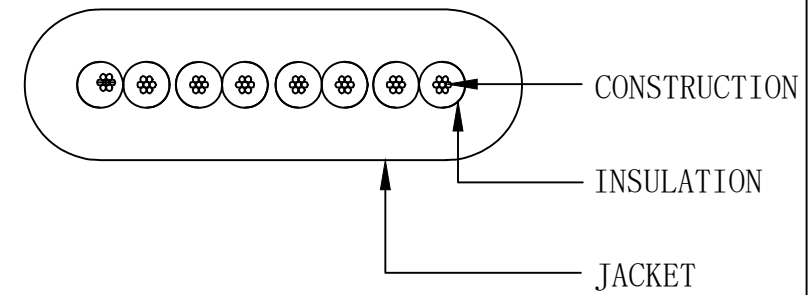


WIRING DIAGRAM



NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST
2. Fluke test
Test limit: ISO 11801 CHANNEL CLASS EA
3. PRINT WORD: CAT6A U/UTP FLAT 4x2x32AWG/7 PVC ISO11801 & EN50173 & ANSI/TIA568C. 2
4. ROHS2.0 AND REACH COMPLIANT

MATERIAL LIST

③	OVER MOLD	PVC Colour Yellow(Pantone 135C)	2	
②	CONNECTOR	RJ45 8P8C Unshielded Plug, Pin Gold Plated, Transparent blue	2	
①	CABLE	(32AWG BC*1P)*4 JACKET:PVC OD:1.5±0.2*6.0±0.2mm Yellow(Pantone 135C)	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

ITEM	LENGTH
21. 99. 2030	500±30mm
21. 99. 2031	1000±30mm
21. 99. 2034	1500±50mm
21. 99. 2032	2000±50mm
21. 99. 2033	3000±70mm
21. 99. 2035	5000±70mm

DESC. VALUE Cat.6A UTP PatchCord yellow

		NEW	2022-06-01	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

