

12G-SDI to HDMI Converter


VC486

The VC486 is a 12G-SDI to HDMI Converter that converts HD/3G/6G/12G-SDI input signals to an HDMI output in real time. It supports various transmission distances depending on different SDI formats, including 45 m (12G-SDI), 60 m (6G-SDI), 90 m (3G-SDI), and 150 m (HD-SDI), offering the flexibility for professional video projects. In addition, the converter works with ATEN VC486 Configuration Software, allowing users to configure the device's input, output, and audio settings with ease. The VC486 is a perfect choice for converting SDI signal to HDMI for applications such as broadcasting, medical imaging and industrial inspection.



Features

- Converts HD/3G/6G/12G-SDI input signals to an HDMI output in real time
- SDI signal re-clocked for high signal quality
- Supports SDI standard SMPTE-292/424/425-3/2081/2082
- Supports an SDI distance of up to 45 m (12G-SDI), 60 m (6G-SDI), 90 m (3G-SDI) and 150 m (HD-SDI)
- Supported SDI formats:
 - HD-SDI (SMPTE 292M, 296M, up to 1.485 Gbps)
 - 3G-SDI (SMPTE 424M, 425M level A and B, up to 2.97 Gbps)
 - 6G-SDI (SMPTE 2081-1, SMPTE 2081-10, up to 6 Gbps)
 - 12G-SDI (SMPTE 2081-1, SMPTE 2081-10, SMPTE 2082-1 and SMPTE 2082-10, up to 12 Gbps)
- Supports analog stereo audio output with RCA (R/L) connector
- Automatic detection of input video signals
- Analog Audio channel selection with a 8-step rotary switch
- Locking power connector
- Works with ATEN VC486 Configuration Software for the device's input, output, and audio settings configuration.

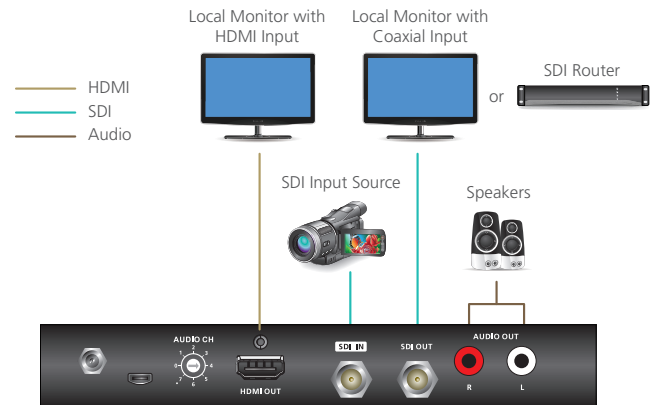

Specifications

VC486	
Switches	
Analog Audio Selection	1 x Rotary Switch (8-steps)
Control	
USB	1 x Micro USB (FW upgrade)
Video Input	
Interfaces	1 x SDI (BNC connector, inter-locked socket)
Impedance	75 Ω
Video Output	
Interfaces	1 x HDMI (Type-A) Female 1 x SDI (BNC connector, inter-locked socket)
Impedance	HDMI 100 Ω / SDI 75 Ω
Video	
Max. Data Rate	12 Gbps
Supported Resolutions	720p50, 720p59.94, 720p60, 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60, 1080pSF25, 1080pSF29.97, 1080pSF30, 1080i50, 1080i59.94, 1080i60 2K DCI 23.98p, 2K DCI 24p, 2K DCI 25p, 2K DCI 25PsF 2160p23.98, 2160p24, 2160p25, 2160p29.97, 2160p30, 2160p50, 2160p59.94, 2160p60 4K DCI 23.98p, 4K DCI 24p, 4K DCI 25p
Max. Distance	[12G-SDI] up to 45 m; [6G-SDI] up to 60 m; [3G-SDI] up to 90 m; [HD-SDI] up to 150 m; HDMI up to 3 m (3840 X 2160@60Hz)
Audio	
Output	1 x HDMI (Type-A) Female 2 x RCA Connector Female (R/L, analog audio)
Format	Compliance with HDMI with Audio 2 CH HD-SDI (SMPTE 292M, 296M, up to 1.485 Gbps) 3G-SDI (SMPTE 424M, 425M level A and B, up to 2.97 Gbps) 6G-SDI (SMPTE 2081-1, SMPTE 2081-10, up to 6 Gbps) 12G-SDI (SMPTE 2081-1, SMPTE 2081-10, SMPTE 2082-1 and SMPTE 2082-10, up to 12 Gbps)
Connectors	
Power	1 x DC 5V 3A, Lockable
Power Consumption	DC5V:5.69W
Environmental	
Operating Temperature	0 - 40°C
Storage Temperature	-20 - 60°C
Humidity	20 - 90% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.65 kg
Dimensions (L x W x H)	18.20 x 12.96 x 2.87 cm

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 08/2021 V3.0

© Copyright 2021 ATEN® International Co. Ltd.
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.
 The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

